

IT2000

4G (LTE), 3G, Wi-Fi and GSM MARINE ANTENNA

	Sail Boat	Power Boat	Big Yacht
ANTENNA CODE	IT2000		
FREQUENCY RANGE	700 -960 MHz	1710-2700 MHz	
GAIN	3 dBi	5 dBi	
VSWR	≤ 1.5	≤ 1.2	
IMPEDANCE	50 Ω		
POLARIZATION	Vertical		
MAX INPUT POWER	50W		
DC GROUND	Yes		
ANTENNA LENGTH (diamxh)	250mm (10") x 300 mm (12")		
ANTENNA WEIGHT	500 g (1,1 lb)		
TERMINATION	N female		
RADOME MATERIAL	U.V. resistant ASA		

Quick and easy installation of the cable:


First, open the radome of IT2000; Then, insert the cable with a pre-installed N male connector on the termination antenna (Fig.A); Finally, screw the connector counter clockwise by a plier (Fig. B)

N.B. The choice of the cable you must use depends by your installation. Anyway, the cable must be a low loss cable for the frequency range from 700 MHz to 3 GHz. The cable must be fitted with a N male connector.

A)



B)

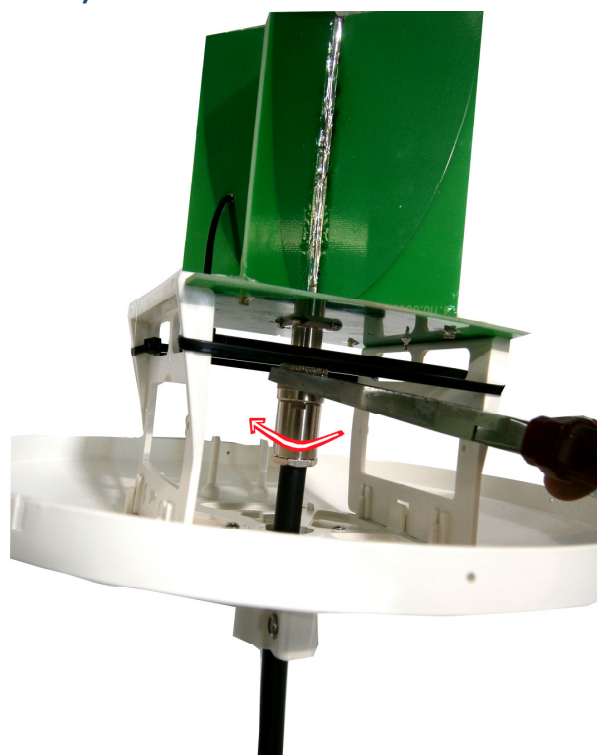

ACCESSORIES (Not Included)

Code: V9124



Stainless steel universal mount – 150 mm (6") height, 25 mm (1") diam.

Code: V9123



Stainless steel Masthead mount – 25 mm (1") diam. Long 16,5 cm (6,5")

Code: V9173TV



Stainless steel Masthead mount – 25 mm (1") diam. Long 27,5 cm (10,8")

